

CE

LED

IP56

230V

IK10



CLO

QuarkLED

Art.No.	Type
<b>551-60AS-235-K2</b>	QuarkLED AS park fitting excl. pole. SLM 12W/830. Clear PC. CL.II. Hot galvanized steel.
<b>511-60AS-245-K2</b>	QuarkLED AS park fitting excl. pole. SLM 12W/840. Clear PC. CL.II. Hot galvanized steel.
<b>551-61AS-235-K2</b>	QuarkLED AS park fitting excl. pole. SLM 18W/830. Clear PC. CL.II. Hot galvanized steel.
<b>551-61AS-245-K2</b>	QuarkLED AS park fitting excl. pole. SLM 18W/840. Clear PC. CL.II. Hot galvanized steel.
<b>551-62AS-235-K2</b>	QuarkLED AS park fitting excl. pole. SLM 24W/830. Clear PC. CL.II. Hot galvanized steel.
<b>551-62AS-245-K2</b>	QuarkLED AS park fitting excl. pole. SLM 24W/840. Clear PC. CL.II. Hot galvanized steel.
<b>+ PROG01</b>	Dimmer profil 01 = ON/OFF without dimming
<b>+ PROG07</b>	Dimmer profil 07 = 60% 20:00-22:00, 40% 22:00-05:00, 60% 05:00-06:00 (stepdimmer).
	See other dimming profiles on page 100.

**Accessories:**

<b>802-70-035-2</b>	Ø60/117mm conical pole. LPH 3,50M f/burial. 4,10/3,50M. Hot galvanized steel.
<b>800-145-500</b>	Insulation sleeve (foam block) Ø135/60 for poles Ø133/Ø108mm.
<b>920-634-200</b>	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
<b>924-100-002</b>	Fuse inset MINI for Ø108/Ø133mm poles (fits to LPH 2,50M and 3,00M).
<b>800-13-108-2</b>	Bracket f/OPUS74 outlet (excl). Fits t/Ø108mm pole. Hot galvanized steel.
	----- Several variations of poles, accessories and spare parts. See page 103-130 -----


Note: QuarkLED AS is supplied with a built-in Screen.

**Variation options:**

- For Ø133mm cylindrical pole.
- With wall arm.
- Bigger top screen Ø730mm.
- Possibility of project-oriented configuration.
- Dimmable with DynaDimmer.
- Available with DALI.
- Light output from the luminaire: 1279-2589Lm.

**Key features:**

- 10 year anti-corrosion warranty (hot galvanized).
- 10 year reorder warranty.
- 5 year LED & driver warranty.
- Supplied with 3,5M cable.
- Life expectancy: 50.000 hours.
- Integrated 6/10 kV surge protection.

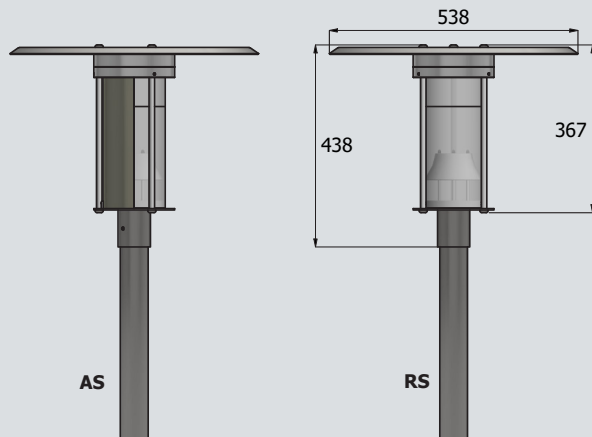

David®

davidsuperlight.dk 